

A REFLECTION ON OPTICAL COATINGS

This past spring I did some telescope testing for my friend Rock Mallin, with the objective of comparing back-to-back a typical commercially available Schmidt-Cassegrain telescope (SCT) to an equivalent aperture Ritchey-Chrétien (RC). To perform the test I used my own 8" Meade LX-10, comparing it to an 8" MallinCam VRC loaned to me by Rock. As expected the RC was found to provide superior image contrast and brightness, but many people who reviewed my test report questioned how much of the difference was due to the fact that I have an older model of SCT. How would the RC compare to a modern SCT?

The difference in image brightness between the two scopes I tested, once focal ratio had been accounted for, is due to the differences in the transmissive efficiency of each scope's optics. The SCT has four reflective surfaces (two sides of corrector plate, primary & secondary mirrors) at which some of the incoming light can be lost. The RC has no corrector plate, and therefore only has two reflective surfaces to worry about. The two scopes also have different coating technologies applied, the SCT using traditional metallic aluminum coatings with a dielectric protective topcoat, and the VRC has purely dielectric reflective coatings. Finally the LX-10 used in my testing is about 10 to 15 years old, so on top of the fact that it has older technology coatings there has possibly been some degradation of the coatings as well. To fully understand the differences in performance between these two types of scope, it is necessary to examine the coating technologies in more detail.

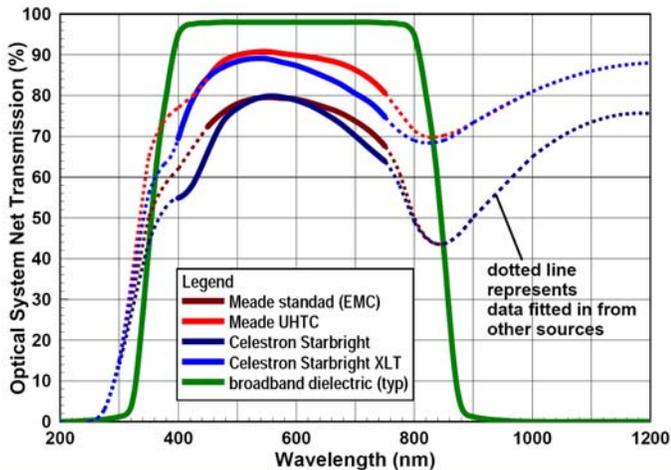


Figure 1. Optical System Spectral Transmission By Coating System: Total system response data is available from Meade & Celestron for the visual band. Data for outside the visual band, and for a typical dielectric mirror has been estimated by combining data from several third party sources.

I was able to easily find manufacturer published data from Meade and Celestron on their coating systems. Meade identifies two coating systems: standard, and Ultra High Transmission Coatings (UHTC). Today's "standard" Meade coating is equivalent to the EMC coating system on my LX-10. Celestron also has two coating systems: Starbright, and Starbright XLT. On all SCT mirrors the coating providing the bulk of the reflectivity is an initial layer of pure metallic Aluminum. To protect the Aluminum from corrosion, and to

improve its reflective properties, a thin dielectric coating is applied on top. Mirror top coat materials include various combinations of SiO, MgF₂, SiO₂, and TiO₂. Corrector plates also have coatings applied in order to reduce reflectivity. Corrector plate anti-reflection coating materials include various combinations of Al₂O₃, TiO₂, and MgF₂. Figure 1 shows the transmission data provided by each manufacturer for their coating systems. The plot shows the net percentage of light passed by the entire optical system. I have combined the manufacturer data with other information available on the web in order to extrapolate the performance graphs beyond just the visual band.

The mirrors of the RC I tested do not use a metallic coating to give them their reflectivity. They use a completely dielectric coating. A dielectric coating works much the same way as a band-pass filter made for light pollution. Many thin alternating layers of non-conductive (dielectric) material are applied to the glass substrate, which in this case is the mirror blank. A small percentage of the incoming light is reflected at each interface between layers due to the change in refractive index. The thickness of each layer is selected very carefully so that each layer's reflection is in phase with the neighboring layer's reflection, resulting in constructive wave interference. The result is very high (99.9%) reflectivity for the design wavelength. Dielectric coatings are very hard and durable, making them easy to care for. They have been in use for several years on mirror diagonals, and now that the costs to apply are coming down, dielectric coatings are becoming popular on telescope optics as well. Figure 1 shows a typical transmission curve for an RC with dielectric coated mirrors. I was unable to find data specific to the VRC's actual mirrors, so the plot shown is an amalgamation of data from several different coating suppliers in North America. Note that outside the design wavelength band, dielectric mirrors have basically zero reflectivity. This was a surprise to me when I initially discovered it.

To determine the impact of coating system on telescope performance I combined the data in Figure 1 with the spectral data I had already on hand for the detector (human eye, MallinCam), light source (bright nebula, dim nebula, galaxy, Moon, light polluted sky), and filter (no filter, Astronomic UHC, Baader UV/IR, 680nm Pass). By stacking these four things together numerically, detector + filter + telescope + light source, I was able to predict the relative brightness of each coating system. Since the Celestron coating system seems to perform similarly to the Meade system, I have only used the Meade system in my calculations. Figure 2 shows the relative brightness of each coating system when the scopes are used visually. Regardless of light source, the more modern UHTC coating is about 16% brighter than the standard coating. The dielectric coated RC performs even better, at about 27% brighter than the standard coated SCT. Figure 3 shows the relative brightness of each coating system when the scopes are used with a typical CCD camera, in this case a MallinCam Xtreme (sensor = Sony ICX418AKL). Relative scope performance on bright and dim nebulae is similar to what was found during visual use, but performance on infrared rich light sources like galaxies and the Moon varies significantly.

A REFLECTION ON OPTICAL COATINGS

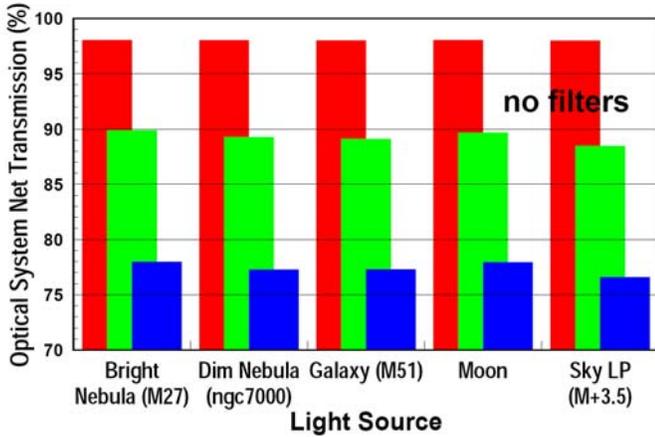


Figure 2. Predicted Optical System Net Transmission – Visual Use: The improvement in image brightness between standard coatings, UHTC coatings, and dielectric coatings is consistent regardless of the target when the scopes are being used visually.

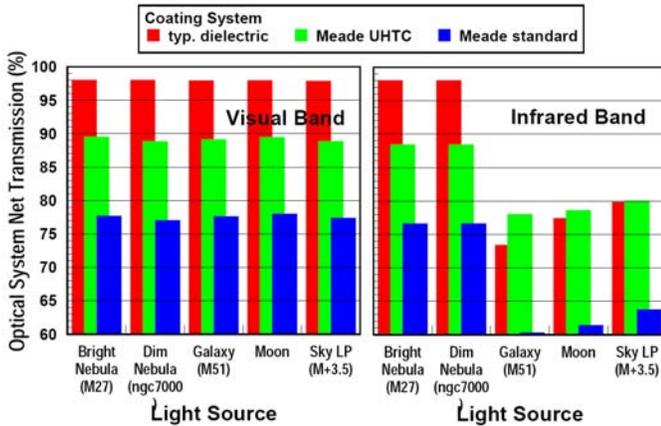


Figure 3. Predicted Optical System Net Transmission – CCD Use: In the visual band the difference in image brightness between different coatings is very similar with a CCD as it is for visual observation. The performance is quite different in the near infrared band however, having implications when viewing IR rich objects like galaxies, globular clusters, the Moon or even planetary work.

To confirm my predictions of relative brightness, I went back to some of the images I collected during my telescope comparison testing. Figure 4 shows screen captures of M42 from my testing taken with my SCT and the RC, with no filters. Accounting for the focal ratio difference (f/10 versus f/8), the RC image still took less exposure time to get the same relative image brightness. Using the exposure times as a measure of the relative brightness between the two scopes, the RC was about 26% brighter than the SCT. The predictions in Figure 3 suggest that the RC should be around 26 to 27% brighter, meaning that the optics in my LX-10 don't seem to have degraded at all; a reasonable and entirely believable outcome. My LX-10 may be 10 to 15 years old, but it has coatings that include a protective dielectric top coat which prevents degradation. I have also cleaned my mirrors and corrector plate within the last 12 months, so scope performance should be pretty close to on-spec.



8" LX-10 @ f/10, 30 sec INT



VRC8 @ f/8, 14 sec INT

Figure 4. SCT/RC Visual Comparison – M42 with no filters: These video frames of M42 from the author's Mallincam were captured at different exposure times in order to match image brightness. The different exposure times can then be used to calculate the relative brightness of the two telescope systems.

Figure 5 shows screen captures from my testing with a 680nm High Pass filter. Based on the exposure time and the difference in focal ratio, the RC was approximately 20% brighter than the SCT. My predictions suggest the RC should be about 21% brighter than the SCT. Again my direct observations are consistent with the predicted brightness of these different telescopes. Having two separate observations corroborate my predictions gives me a high level of confidence that the predictions are accurate. Continuing with that assumption, the following conclusions can be made about the performance of these different scopes when used with a Mallincam or other CCD based device:

A REFLECTION ON OPTICAL COATINGS



8" LX10 @ f/5.3, 187 sec INT



VRC8 @ f/4.1, 90 sec INT

Figure 5. SCT/RC Visual Comparison – M51 with 680nm high pass filter: These video frames of M51 from the author's Mallincam were captured at different exposure times but with an IR high pass filter installed.

- When limited to just the infrared band (>700nm) using an IR High Pass filter, the RC is approximately 20-25% brighter than SCT's with standard coatings, and 1-6% dimmer than SCT's with enhanced coatings, assuming the target is IR rich such as the Moon, planets, galaxies, or clusters. Optics with dielectric reflective coatings designed for visual use are probably not suitable for use with IR high pass filters that have cut-off wavelengths above 800nm.

Thus, the bottom line is that by test and by calculation, the optical system of the RC with its dielectric coatings results in superior image brightness compared to modern SCT's, regardless of coating technology. One question I can't answer for certain is how a hypothetical but entirely possible SCT with dielectric mirror coatings may compare to the RC. Based on the fact that an SCT has a corrector plate at which some percentage of the incoming light is lost, but an RC does not, I would have to guess that the RC will always be a little brighter than the SCT. As for the question on whether or not it is worthwhile to upgrade my old LX-10 for a modern RC or SCT with UHTC optics, getting a 15 to 25% increase in image brightness is pretty significant. When I consider that with the coma-free optics available today, I believe an upgrade is in my foreseeable future!

For questions or comments please contact me at: karmalimbo@yahoo.ca.

- When viewing emission nebulae or solar system objects using the entire band of the CCD (ie. no filters), the RC is 26-28% brighter than SCT's with standard coatings, and 9-10% brighter than SCT's with enhanced coatings like UHTC or Starbright XLT.
- When viewing galaxies or clusters using the entire band of the CCD, the RC is 24-25% brighter than SCT's with standard coatings, and 4-5% brighter than SCT's with enhanced coatings.
- When limited to just the visual band (400-700nm) using a UV/IR Cut filter, the RC is 25-27% brighter than SCT's with standard coatings, and 9-10% brighter than SCT's with enhanced coatings, regardless of the target.